

GOT5100T-845 NEW

10.4" XGA/SVGA TFT Fanless Touch Panel Computer with Intel® Celeron® Processor N3060

Features


- 10.4" XGA/SVGA TFT LCD display with LED backlight
- Fanless design with Intel® Celeron® processor N3060
- 2 GbE LAN, 4 USB and 2 COM
- Plastic and IP65-rated front bezel
- Supports RFID (optional)
- External AT/ATX mode selection switch
- Easy access storage design
- Supports optional panel mount/wall mount/VESA arm/desktop stand
- Adjust RS-232/422/485 setting via BIOS



▲ Side view



▲ Desktop stand

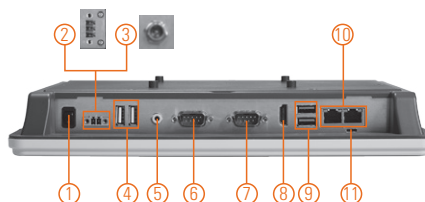

1. Power switch (ATX)
2. Terminal block for DC power input or
3. Screw conn. w/ AC power adapter
4. USB 2.0 x 2
5. Audio (Line-out)
6. COM 1 (RS-232/422/485)
7. COM 2 (RS-232)
8. HDMI
9. USB 3.0 x 2
10. Ethernet (RJ-45)
11. AT/ATX selectable switch



Introduction

The GOT5100T-845 is a 10.4" Intel® Celeron®-based fanless touch panel computer. In response to market demand, this panel computer is a cost effective solution. It adopts a modern, super sleek and fanless design and is equipped with a 10.4" TFT LCD as well as Intel® Celeron® processor N3060 dual core up to 2.48 GHz. For wireless network connection, the GOT5100T-845 offers 2 PCI Express Mini Card slots. By just plugging in the mini card WLAN card, customers can have instant access to wireless LAN/GPRS/GSM/4G environments. Besides, it provides two types of power input. One is DC power with terminal block connector, and another is AC power adapter with screw type connector.

Super Slim & Ultra Lightweight Design

The GOT5100T-845 is a super slim touch panel computer for space-limited environment with its thickness of 45.8 mm and weight of 1.8 kg only, which make it installed everywhere.

Built-in Internal WLAN Antenna

The GOT5100T-845 provides 2 PCI Express Mini Card slots and a built-in WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the GOT5100T-845 in a wireless LAN/GPRS/GSM/4G environments.

Aluminum Back Chassis with Excellent Thermal Solution

With Axiomtek's patent for plastic plus aluminum mechanism design, the GOT5100T-845 can dissipate the heat easily and keep the system operation stable.

Specifications

| | | |
|-------------|---|--|
| Front Bezel | IP65, NEMA 4 rugged protection, plastic front bezel | |
| LCD Panel | Display Type | 10.4" XGA/SVGA TFT LCD with LED backlight |
| | Brightness (cd/m ²) | 350 nits (XGA) 400 nits (SVGA) |
| | Resolution | 1024 x 768 (XGA) 800 x 600 (SVGA) |
| | Viewing Angel (H/V) | 140°/120° |
| | Main System | CPU |
| | System Memory | 1 x 204-pin DDR3L-1600 MHz SO-DIMM, up to 8GB |
| | BIOS | AMI UEFI BIOS |
| | Storage | 1 x 2.5" 7/9.5mm SATA HDD 1 x mSATA |
| | Watchdog Timer | 255 levels, 0 ~ 255 sec. |
| | Onboard Graphics | Integrated in Intel® GFX |

Specifications

| | |
|---------------------|---|
| I/O Connector | 1 x RS-232 (COM 2) 1 x RS-232/422/485 (default RS-232, COM 1) 1 x HDMI 1 x Switch for power on/off 1 x AT/ATX mode selection switch 2 x USB 2.0 2 x USB 3.0 1 x Audio (Line-out) 2 x 10/100/1000 Mbps Ethernet (Intel® i211AT) |
| Expansion Interface | 1 x full-size PCI Express Mini Card slot with mSATA 1 x full-size PCI Express Mini Card slot with SIM |
| Touchscreen | Resistive type |
| Power Supply | 1. AC version: 100 ~ 240 V AC-DC, 60W power adapter or 2. DC version: 24 VDC with over current protection fuse |
| Power Consumption | 32 W |
| Dimension | 292.5 mm (11.52") (W) x 45.8 mm (1.80") (D) x 235.8 mm (9.28") (H) |
| Packing Dimensions | 415 mm (16.34") (W) x 100 mm (3.94") (D) x 315 mm (12.4") (H) |
| Weight (net/gross) | 1.8 kg (3.96 lb)/3 kg (6.61 lb) |
| Environment | Operating temperature: 0°C ~ +50°C (+32°F ~ +122°F) (with W.T. DRAM/HDD in airflow condition) 0°C ~ +45°C (+32°F ~ +113°F) (with W.T. DRAM/HDD) Relative humidity: 20% ~ 90% @ +40°C; non-condensing Operation vibration: 2G, 5 ~ 500Hz, random for SSD |
| Certificate | CE |

Ordering Information

| Standard | |
|------------------------|---|
| GOT5100T-845-J | 10.4" SVGA fanless touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen, AC-DC 60W power adapter (screw type connector) and EMI class A |
| GOT5100T-845-24VDC | 10.4" SVGA fanless touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen and 24 VDC power input (terminal block connector) |
| GOT5100T-845-XGA-J | 10.4" XGA fanless touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen, AC-DC 60W power adapter (screw type connector) and EMI class A |
| GOT5100T-845-XGA-24VDC | 10.4" XGA fanless touch panel computer with Intel® Celeron® processor N3060, 5-wire resistive touch screen and 24 VDC power input (terminal block connector) |

| Optional | |
|------------------------------|--|
| Wi-Fi + Bluetooth kit | |
| 881281021A0E Panel mount kit | |
| 881251001A0E VESA mount kit | |
| E226171106 Stand kit | |
| Speaker kit | |
| 881251203A0E RFID kit | |

* Specification and certifications are based on requirements and may vary.

Optional EOS Installation

| |
|---------------|
| WES 7 |
| WE8S (64-bit) |

Optional OS Installation

| |
|-----------------------|
| Windows® 7 |
| Windows® 8.1 (64-bit) |
| Windows® 10 |



Dimensions

