

XE1

High-performance single board computer featuring Dual-Core AMD G-Series processor for Windows applications.


PROCESSOR



OPERATING SYSTEM



I/O

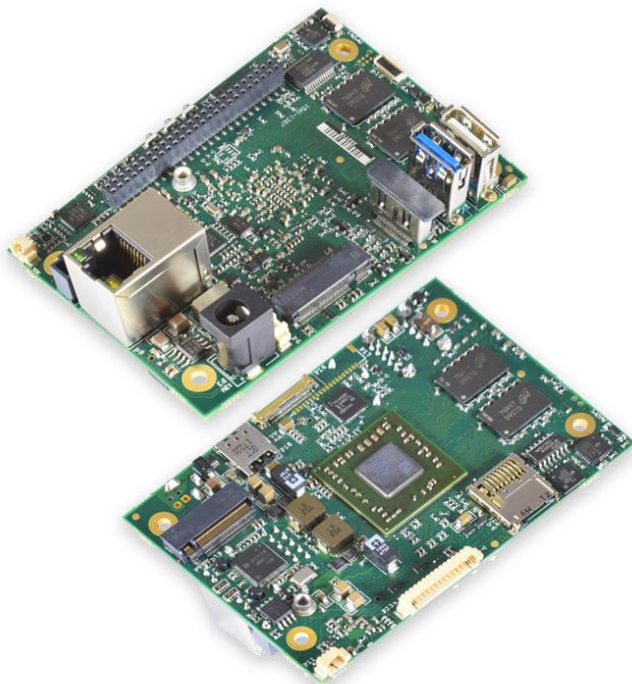

› x86 / x64

Run all of your existing Windows-based applications with minimal effort in migration.

› Passively Cooled

At 4.5W TDP, the AMD G-Series APU is ideal for power-conscious applications.

› High Performance

Features a dual-core CPU and Radeon graphics supporting DirectX 11.2.

› Long-Life Components

Carefully-chosen components mean the XE1 will be available for at least 10 years.

SUMMARY

The XE1 single board computer offers high performance, low power and long life in a small form factor.

Capable of running Windows 10 IoT Enterprise and other desktop versions of Windows, the XE1 is the ideal choice for customers wanting to run their existing applications with little fuss.

- Dual-core 1GHz AMD Jaguar x64 / x86 APU
- Radeon graphics supporting DirectX 11.2
- 2GB and 4GB 64-bit DDR3 1333 memory options
- MicroSD, M.2 and SATA storage options
- WiFi, Bluetooth and 3G available via expansion
- USB 3.0 and USB 2.0 ports
- SMBUS and 12 GPIOs
- Three serial ports - RS232 and RS232/RS422/RS485
- LCD and HDMI display options
- Runs Windows 10, Linux and Android x86

XE1

TECHNICAL SPECIFICATIONS

Core System

Processor	AMD Embedded G-Series LX x2 'Jaguar' x64 / x86 cores, 1MB shared L2 cache Dual-Core CPU 1GHz clock speed
Memory	Low-power DDR3 DDR-1333 memory speed 64-bit memory bandwidth 2GB and 4GB options
Storage	MicroSD socket M.2 SSD SATA
Graphics	AMD Radeon R1E graphics processor DirectX 11.2 HDMI Display LVDS Display Dual independent displays
Audio	High Definition Audio Cirrus Logic CS4207 codec Stereo Inputs and Outputs 3W Class-D amplifier
Watchdog	Yes
Real Time Clock	Yes - battery backup option

Display & Touch

Touch Interface Type	Support for Resistive and Projected Capacitive touch screens
----------------------	--

Operating System

OS Support	Windows 10, Linux Ubuntu & Android x86
------------	--

I/O

Ethernet	10/100/1000 LAN via Intel I211 Controller Optional second LAN through M.2
Wireless	WiFi, Bluetooth, 3G and GPS via USB or M.2 modules SIM socket
Serial	x1 USB 3.0 connector x1 USB 2.0 connector x1 USB 2.0 via 50W expansion header SMBUS up to 400KHz x2 RS232 ports x1 RS232 / RS422 / RS485 ports (factory selectable) <i>Note: The RS485 TX/RX switch timing may be subject to operation system latency</i>
GPIO	12 signals
Camera Interface	USB
Expansion/Other	x2 M.2 sockets (2230 Key A, 2242 Key B) 50-way expansion connector

Power


Input Connector	DC Jack or Screw Terminal
Input Voltage	Recommended operating voltage for reliable operation: 12V DC +/- 5% Absolute maximum voltage: 17v DC
Power Consumption	0.414 amps @ 12 volts (5W) with Windows 10 in idle state (using M.2 SSD, no display, no peripherals, no ethernet) Suspend and Resume not supported

Physical

Operating Temperature	0°C to 55°C
Storage Temperature	TBD
Humidity	TBD
Overall Dimensions	TBD
Mounting Options	TBD
Approvals	CE, UKCA

OPTIONAL FEATURES

Add further functionality that you require through these optional extras:



Please note, these components may alter the technical specifications of the overall product (i.e. a change to the operating temperature).

M.2 EXPLAINED

M.2 is a specification for compact, low-power and flexible expansion cards. The flexibility comes from the option to transmit a variety of signals (SATA, USB and PCIe) and the different form factors it comes in.

M.2 cards and sockets are labelled in a way to indicate both the functionality and the size of the card, for example '2230 Key A'. The number (2230) refers to the width and length of the card in millimeters. The 'Key' refers to the physical connector / socket and the signal transfer it supports.

The details of the two M.2 sockets provided on the XE1 are as follows:

Location	Key	Supports	Number	Measurements
Top	B	SATA and USB	2242	22mm (W) x 42mm (L)
Bottom	A	PCIe (x1) and USB	2230	22mm (W) x 30mm (L)

For more information, visit bluechiptechnology.com